
KVT-W90 | Split 90° cable gland

for cables with connectors, M32/M50 / IP54

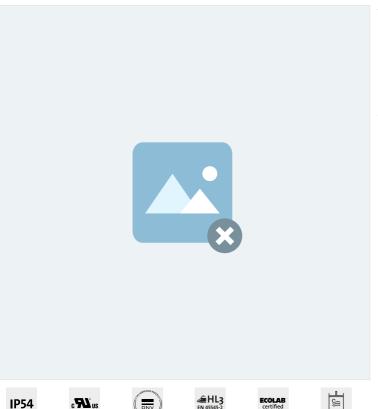

The split KVT-W90 cable glands are used to insert and seal pre-terminated cables at a 90° angle. But also electric, pneumatic or hydraulic lines without terminals or connectors as well as corrugated conduits can be easily routed (e.g. into control panels, enclosures or machinery) and sealed with IP54.

In particular, the KVT 50-W90 is perfectly suited to hold corrugated or smooth hoses. A large number of cable entry grommets is available to the user. By using $\underline{\text{multi-hole grommets}}$ up to 16 lines can be routed with one cable gland.

Polyamide standard locknuts as well as a sealing ring are included in the shipment. <u>Split locknuts</u> can be ordered separately.

Specifications

RoHS

IP rating (EN 60529)	IP54
Material	Polycarbonate
Flame class	UL94-V0, self-extinguishing
Operating temperature	-30 C° to 100 C°
Properties	halogen free, silicone free
Mounting options	Fasten with locknut

Advantages & benefits

Installation at an angle of 90° to the wall

Routing of cables with and without connectors

Warranty on pre-terminated cables remains

Suitable for metric cut-outs

Hexagonal locknut included in the delivery

Product types & sizes



Part No.
EAN
Package quantity
For max. no. of cables
Max. cable diameter
Colour
Height


45404 4251269311406 10 4 17 mm grey (similar RAL 7035) 40 mm Mounting height Cut-out size, metric Cut-out size, round Thread Thread length Suitable for grommets 26 mm M32 32,3 mm M32 × 1,5 11,5 mm 1 x KT small



Part No. EAN Package quantity For max. no. of cables Max. cable diameter Colour Height

Mounting height Cut-out size, metric Cut-out size, round Thread Thread length Suitable for grommets 26 mm M32 32,3 mm M32 × 1,5 11,5 mm 1 x KT small

KVT 50|4-W90 gy



Part No.
EAN
Package quantity
For max. no. of cables
Max. cable diameter
Colour
Height

45424 4251269311444 5 16

17 mm grey (similar RAL 7035) 61 mm Mounting height
Cut-out size, metric
Cut-out size, round
Thread
Thread length

Suitable for grommets

46,5 mm M50 50,4 mm M50 × 1,5 11,5 mm 4 x KT small

KVT 50|4-W90 bk




Part No.
EAN
Package quantity
For max. no. of cables
Max. cable diameter
Colour
Height

45426 4251269311451 5 16

16 17 mm black 61 mm Mounting height
Cut-out size, metric
Cut-out size, round
Thread
Thread length
Suitable for grommets

46,5 mm M50 50,4 mm M50 × 1,5 11,5 mm 4 x KT small

KVT 50|1-W90 gy



Part No. EAN Package quantity For max. no. of cables Max. cable diameter Colour Height 45414 4251269311420 5 1

35 mm grey (similar RAL 7035) 61 mm Mounting height 46,5 mm

Cut-out size, metric M50

Cut-out size, round 50,4 mm

Thread M50 \times 1,5

Thread length 11,5 mm

Suitable for grommets 1 \times KT large

KVT 50|1-W90 bk



Part No.
EAN
Package quantity
For max. no. of cables
Max. cable diameter
Colour
Height

Mounting height
Cut-out size, metric
Cut-out size, round
Thread
Thread length
Suitable for grommets

46,5 mm M50 50,4 mm M50 × 1,5 11,5 mm 1 x KT large

