

KEL-DPU multi-membrane cable entry plates

with high strain relief function, pluggable / IP66 / IP68 / UL Type 12/4X



KEL-DPU entry plates are designed to route and seal cables without connectors (from 3.2 mm to 20.5 mm in diameter) in limited space with IP66 / IP68* / UL type 12 & 4X** ratings. The gland KEL-DPU is especially characterised by its very robust hard frame made of polypropylene which is completely moulded with elastomer. This results in a high ingress protection and stability as well as in a high strain relief level of the routed cables.

The KEL-DPU 24 matches exactly the cut-out dimensions of 24-pin standard industrial connectors. For optional screw assembly just pierce the membranes on the integrated screw holes with the screw itself. The grey KEL-DPU 24 is also available with threaded bushings. When plugging or screw fixing the KEL-DPU from the inside of the enclosure the screw holes remain completely sealed by the elastomer layer.

The assembly of the KEL-DPU with unterminated cables or pneumatic hoses can be done quick and easy. Simply make a small hole in the thin membrane and push the cables through.

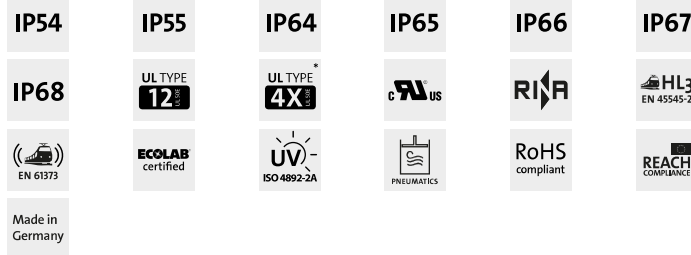
ST-B Plugs can be used for sealing pierced membranes if cables have been removed.

It is also possible to integrate threaded bushings. Please ask us about your desired variant.

The version with threaded bushings enables the cable entry plate to be screwed onto the housing from the inside out. This protects against vandalism and tampering with the housing from the outside.

* IP65/IP66/IP67/IP68 when screw mounted, IP65/IP66 when snapped into the cut-out

** 4X for indoor use only



Specifications


IP rating (EN 60529)	IP54, IP55, IP64, IP65, IP66, IP67, IP68
UL Type (UL 50E)	UL Type 12, UL Type 4X*
Material	Elastomer Base frame: Polypropylene
Flame class	UL94-V0, self-extinguishing
Operating temperature	-40 C° to 100 C°
Properties	silicone free, halogen free
Mounting options	Screw type mounting, Snap-in

Advantages & benefits


- High stability, vibration resistant
- Fast and easy assembly
- High cable density
- Certified protection IP66/IP68 (acc. to EN 60529)
- Hygienic design - free of dirt-collecting recesses

Product types & sizes

KEL-DPU 24|13 gy




Part No.	43940	Width	58 mm
EAN	4251269311031	Height	14 mm
Package quantity	10	Mounting height	14 mm
For max. no. of cables	13	Cut-out size	112 x 36 mm
Max. cable diameter	20,5 mm	For min. wall thickness	1,5 mm
Colour	grey (similar RAL 7035)	No. of screw holes	4
Length	147 mm	For max. wall thickness	2 mm
		Diam. of screw holes	5,8 mm
		Clamping range	10 x 3.2 - 6.3 mm
			3 x 16 - 20.5 mm

KEL-DPU 24|13 bk


Part No. **50940**
 EAN **4251269315398**
 Package quantity **10**
 For max. no. of cables **13**
 Max. cable diameter **20,5 mm**
 Colour **black**
 Length **147 mm**

Width **58 mm**
 Height **14 mm**
 Mounting height **14 mm**
 Cut-out size **112 x 36 mm**
 For min. wall thickness **1,5 mm**
 No. of screw holes **4**
 For max. wall thickness **2 mm**
 Diam. of screw holes **5,8 mm**
 Clamping range **10 x 3.2 - 6.3 mm**
3 x 16 - 20.5 mm

KEL-DPU 24|14 gy


Part No. **43944**
 EAN **4251269311055**
 Package quantity **10**
 For max. no. of cables **14**
 Max. cable diameter **16,2 mm**
 Colour **grey (similar RAL 7035)**
 Length **147 mm**

Width **58 mm**
 Height **14 mm**
 Mounting height **14 mm**
 Cut-out size **112 x 36 mm**
 For min. wall thickness **1,5 mm**
 No. of screw holes **4**
 For max. wall thickness **2 mm**
 Diam. of screw holes **5,8 mm**
 Clamping range **5 x 3.2 - 6.3 mm**
2 x 4 - 7.5 mm
3 x 5.5 - 10.5 mm
1 x 8 - 12.5 mm
3 x 12 - 16.2 mm

KEL-DPU 24|14 bk


Part No. **50944**
 EAN **4251269315411**
 Package quantity **10**
 For max. no. of cables **14**
 Max. cable diameter **16,2 mm**
 Colour **black**
 Length **147 mm**

Width **58 mm**
 Height **14 mm**
 Mounting height **14 mm**
 Cut-out size **112 x 36 mm**
 For min. wall thickness **1,5 mm**
 No. of screw holes **4**
 For max. wall thickness **2 mm**
 Diam. of screw holes **5,8 mm**
 Clamping range **5 x 3.2 - 6.3 mm**
2 x 4 - 7.5 mm
3 x 5.5 - 10.5 mm
1 x 8 - 12.5 mm
3 x 12 - 16.2 mm


KEL-DPU 24|16 gy

Part No. **43936**
 EAN **4251269311017**
 Package quantity **10**
 For max. no. of cables **16**
 Max. cable diameter **14,5 mm**
 Colour **grey (similar RAL 7035)**
 Length **147 mm**


Width **58 mm**
 Height **14 mm**
 Mounting height **14 mm**
 Cut-out size **112 x 36 mm**
 For min. wall thickness **1,5 mm**
 No. of screw holes **4**
 For max. wall thickness **2 mm**
 Diam. of screw holes **5,8 mm**
 Clamping range **8 x 3.2 - 5.5 mm**
6 x 5 - 8.5 mm
2 x 9.5 - 14.5 mm

KEL-DPU 24|16 bk


Part No.	50936	Width	58 mm
EAN	4251269315374	Height	14 mm
Package quantity	10	Mounting height	14 mm
For max. no. of cables	16	Cut-out size	112 x 36 mm
Max. cable diameter	14,5 mm	For min. wall thickness	1,5 mm
Colour	black	No. of screw holes	4
Length	147 mm	For max. wall thickness	2 mm
		Diam. of screw holes	5,8 mm
		Clamping range	8 x 3.2 - 5.5 mm
			6 x 5 - 8.5 mm
			2 x 9.5 - 14.5 mm

KEL-DPU 24|16-1 gy

Part No.	43932	Width	58 mm
EAN	4251269310997	Height	14 mm
Package quantity	10	Mounting height	14 mm
For max. no. of cables	16	Cut-out size	112 x 36 mm
Max. cable diameter	16,2 mm	For min. wall thickness	1,5 mm
Colour	grey (similar RAL 7035)	No. of screw holes	4
Length	147 mm	For max. wall thickness	2 mm
		Diam. of screw holes	5,8 mm
		Clamping range	2 x 3.2 - 6.3 mm
			9 x 4 - 7.5 mm
			1 x 5.5 - 10.5 mm
			1 x 8 - 12.5 mm
			3 x 12 - 16.2 mm

KEL-DPU 24|16-1 bk

Part No.	50932	Width	58 mm
EAN	4251269315350	Height	14 mm
Package quantity	10	Mounting height	14 mm
For max. no. of cables	16	Cut-out size	112 x 36 mm
Max. cable diameter	16,2 mm	For min. wall thickness	1,5 mm
Colour	black	No. of screw holes	4
Length	147 mm	For max. wall thickness	2 mm
		Diam. of screw holes	5,8 mm
		Clamping range	2 x 3.2 - 6.3 mm
			9 x 4 - 7.5 mm
			1 x 5.5 - 10.5 mm
			1 x 8 - 12.5 mm
			3 x 12 - 16.2 mm


KEL-DPU 24|17 gy

Part No.	43934	Width	58 mm
EAN	4251269311000	Height	14 mm
Package quantity	10	Mounting height	14 mm
For max. no. of cables	17	Cut-out size	112 x 36 mm
Max. cable diameter	12,5 mm	For min. wall thickness	1,5 mm
Colour	grey (similar RAL 7035)	No. of screw holes	4
Length	147 mm	For max. wall thickness	2 mm
		Diam. of screw holes	5,8 mm
		Clamping range	4 x 3.2 - 6.3 mm
			2 x 4 - 7.5 mm
			1 x 5.5 - 10.5 mm
			10 x 8 - 12.5 mm

KEL-DPU 24|17 bk


Part No. **50934**
 EAN **4251269315367**
 Package quantity **10**
 For max. no. of cables **17**
 Max. cable diameter **12,5 mm**
 Colour **black**
 Length **147 mm**

Width **58 mm**
 Height **14 mm**
 Mounting height **14 mm**
 Cut-out size **112 x 36 mm**
 For min. wall thickness **1,5 mm**
 No. of screw holes **4**
 For max. wall thickness **2 mm**
 Diam. of screw holes **5,8 mm**
 Clamping range **4 x 3.2 - 6.3 mm**
2 x 4 - 7.5 mm
1 x 5.5 - 10.5 mm
10 x 8 - 12.5 mm

KEL-DPU 24|20 gy


Part No. **43938**
 EAN **4251269311024**
 Package quantity **10**
 For max. no. of cables **20**
 Max. cable diameter **10,5 mm**
 Colour **grey (similar RAL 7035)**
 Length **147 mm**

Width **58 mm**
 Height **14 mm**
 Mounting height **14 mm**
 Cut-out size **112 x 36 mm**
 For min. wall thickness **1,5 mm**
 No. of screw holes **4**
 For max. wall thickness **2 mm**
 Diam. of screw holes **5,8 mm**
 Clamping range **12 x 3.2 - 5.5 mm**
8 x 5 - 10.5 mm

KEL-DPU 24|20 bk


Part No. **50938**
 EAN **4251269315381**
 Package quantity **10**
 For max. no. of cables **20**
 Max. cable diameter **10,5 mm**
 Colour **black**
 Length **147 mm**

Width **58 mm**
 Height **14 mm**
 Mounting height **14 mm**
 Cut-out size **112 x 36 mm**
 For min. wall thickness **1,5 mm**
 No. of screw holes **4**
 For max. wall thickness **2 mm**
 Diam. of screw holes **5,8 mm**
 Clamping range **12 x 3.2 - 5.5 mm**
8 x 5 - 10.5 mm

KEL-DPU 24|21 gy


Part No. **43930**
 EAN **4251269310980**
 Package quantity **10**
 For max. no. of cables **21**
 Max. cable diameter **12,5 mm**
 Colour **grey (similar RAL 7035)**
 Length **147 mm**

Width **58 mm**
 Height **14 mm**
 Mounting height **14 mm**
 Cut-out size **112 x 36 mm**
 For min. wall thickness **1,5 mm**
 No. of screw holes **4**
 For max. wall thickness **2 mm**
 Diam. of screw holes **5,8 mm**
 Clamping range **1 x 3.2 - 6.3 mm**
14 x 4 - 7.5 mm
4 x 5.5 - 10.5 mm
2 x 8 - 12.5 mm

KEL-DPU 24|21 bk

Part No. **50930**
 EAN **4251269315343**
 Package quantity **10**
 For max. no. of cables **21**
 Max. cable diameter **12,5 mm**
 Colour **black**
 Length **147 mm**


Width **58 mm**
 Height **14 mm**
 Mounting height **14 mm**
 Cut-out size **112 x 36 mm**
 For min. wall thickness **1,5 mm**
 No. of screw holes **4**
 For max. wall thickness **2 mm**
 Diam. of screw holes **5,8 mm**
 Clamping range **1 x 3.2 - 6.3 mm**
14 x 4 - 7.5 mm
4 x 5.5 - 10.5 mm
2 x 8 - 12.5 mm

KEL-DPU 24|32 gy

Part No.
EAN
Package quantity
For max. no. of cables
Max. cable diameter
Colour
Length

43942
4251269311048
10
32
6,3 mm
grey (similar RAL 7035)
147 mm

Width **58 mm**
Height **14 mm**
Mounting height **14 mm**
Cut-out size **112 x 36 mm**
For min. wall thickness **1,5 mm**
No. of screw holes **4**
For max. wall thickness **2 mm**
Diam. of screw holes **5,8 mm**
Clamping range **32 x 3.2 - 6.3 mm**

KEL-DPU 24|32 bk

Part No.
EAN
Package quantity
For max. no. of cables
Max. cable diameter
Colour
Length

50942
4251269315404
10
32
6,3 mm
black
147 mm

Width **58 mm**
Height **14 mm**
Mounting height **14 mm**
Cut-out size **112 x 36 mm**
For min. wall thickness **1,5 mm**
No. of screw holes **4**
For max. wall thickness **2 mm**
Diam. of screw holes **5,8 mm**
Clamping range **32 x 3.2 - 6.3 mm**