



With its compact design and 190° rotating tube, the ALLIO system luminaire offers space-saving lighting for enclosures. This also enables easy retrofitting in existing enclosures.

The High Power LED illuminates with 1050 lumens and offers a service life of 50,000 hours. The opal white polycarbonate tube provides a homogeneous, glare-free area light.

IP20

RoHS
compliant

REACH
COMPLIANCE

Made in
Germany

CE

UK
CA

IK07

IK08

Borrow a sample now




Specifikationer


IP-Klass (EN 60529)	IP20
Protection class	II (Protective insulation)
Material	Tube: Polycarbonate Enclosure: Polycarbonate
Brandklass	
Temperatur	-20 C° till 50 C°
Monteringstyp	Skruvmontering, Magnetic attachment, Clip attachment (patented)

Produkttyper och storlekar

Fördelar

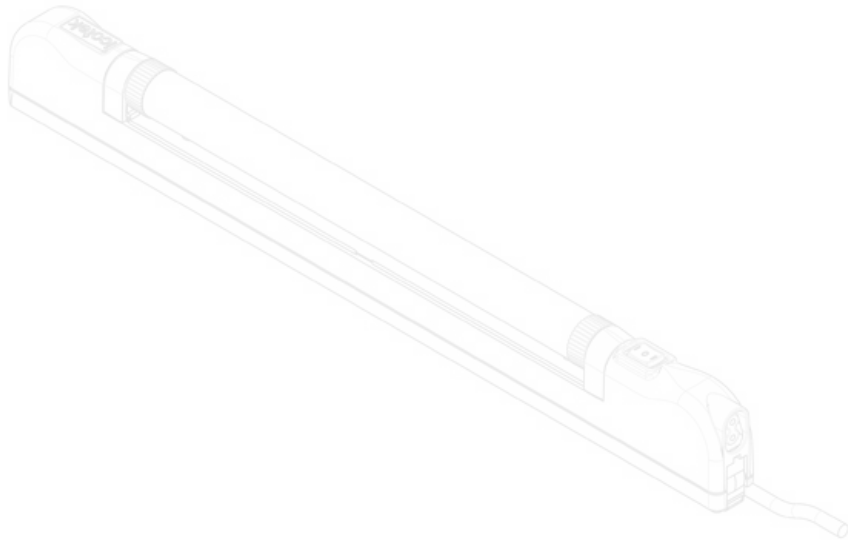


ArtNr.	81100	Connection possibilities	Door operated switch
EAN	4251269333019	Connector type	Ferrules
Antal	1	Rated power	8 W
Längd	448 mm	Operating voltage	24 V DC
Höjd	56,5 mm	Test standard	EN 60598, EN 55015, EN 61000, EN 62741
Bredd	26,2 mm	Protection class	II (Protective insulation)
Length connecting cable	3.000 mm	Guidelines	2014/35/EU, 2014/30/EU
		Service life	50.000 h
		Energy efficiency class	E
		Colour temperature	5.600 K
		Colour rendering index CRI	> 80
		Luminous flux	1.000 lm
		Färg	grå (liknande RAL 7035)

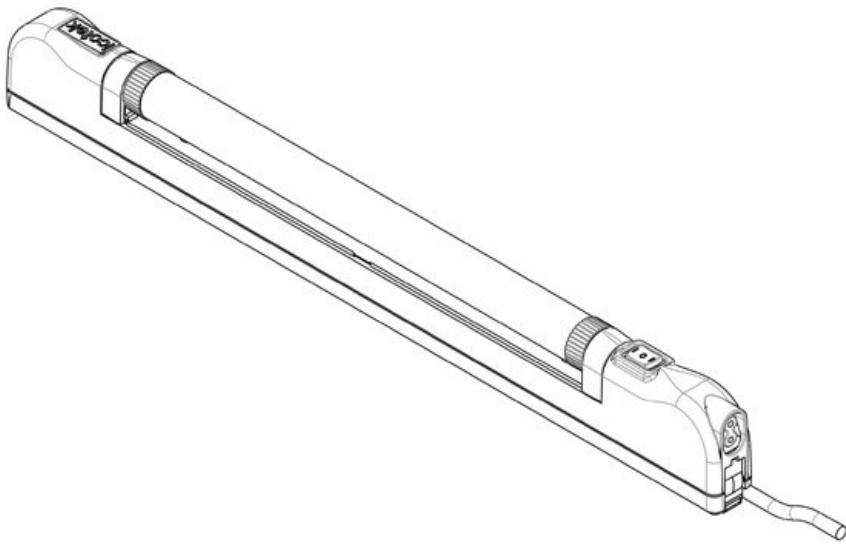


ArtNr.	81202	Length	3.000 mm
EAN		connecting cable	
Antal	1	Connection possibilities	Door operated switch
UL-certifikat	cURus (in progress)	Connector type	Ferrules
Längd	448 mm	Rated power	8 W
Höjd	56,5 mm	Operating voltage	24 V DC
Bredd	26,2 mm	Test standard	EN 60598, EN 55015, EN 61000, EN 62741
		Protection class	II (Protective insulation)
		Guidelines	2014/35/EU, 2014/30/EU
		Service life	50.000 h
		Energy efficiency class	E
		Colour temperature	5.600 K
		Colour rendering index CRI	> 80
		Luminous flux	1.000 lm
		Färg	grå (liknande RAL 7035)




ArtNr.	81101	Version	PIR motion detector
EAN	4251269333	Connector type	Ferrules
Antal	1	Rated power	8 W
Längd	448 mm	Operating voltage	24 V DC
Höjd	56,5 mm	Test standard	EN 60598, EN 55015, EN 61000, EN 62741
Bredd	26,2 mm	Protection class	II (Protective insulation)
Length connecting cable	3.000 mm	Guidelines	2014/35/EU, 2014/30/EU
		Service life	50.000 h
		Energy efficiency class	E
		Colour temperature	5.600 K
		Colour rendering index CRI	> 80
		Luminous flux	1.000 lm
		Färg	grå (liknande RAL 7035)

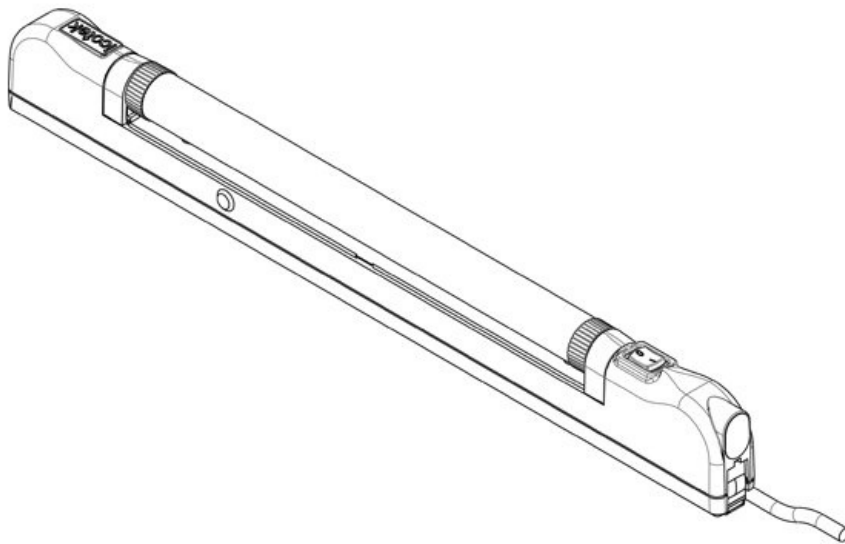


ArtNr.	81203	Length connecting cable	3.000 mm
EAN		Version	PIR motion detector
Antal	1	Connector type	Ferrules
UL-certifikat	cURus (in progress)	Rated power	8 W
Längd	448 mm	Operating voltage	24 V DC
Höjd	56,5 mm	Test standard	EN 60598, EN 55015, EN 61000, EN 62741
Bredd	26,2 mm	Protection class	II (Protective insulation)
		Guidelines	2014/35/EU, 2014/30/EU
		Service life	50.000 h
		Energy efficiency class	E
		Colour temperature	5.600 K
		Colour rendering index CRI	> 80
		Luminous flux	1.000 lm
		Färg	grå (liknande RAL 7035)

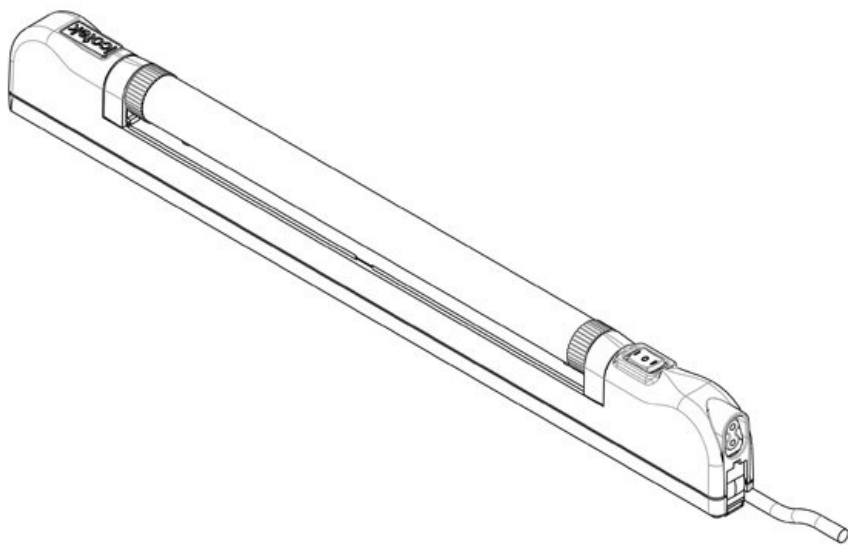


ArtNr.	81102	Connection possibilities	Door operated switch
EAN	4251269333033	Connector type	Ferrules
Antal	1	Rated power	8 W
Längd	448 mm	Operating voltage	220 - 240 V AC, 50 - 60 Hz
Höjd	56,5 mm	Test standard	EN 60598, EN 55015, EN 61000, EN 62741
Bredd	26,2 mm	Protection class	II (Protective insulation)
Length connecting cable	3.000 mm	Guidelines	2014/35/EU, 2014/30/EU
		Service life	50.000 h
		Energy efficiency class	E
		Colour temperature	5.600 K
		Colour rendering index CRI	> 80
		Luminous flux	1.000 lm
		Färg	grå (liknande RAL 7035)

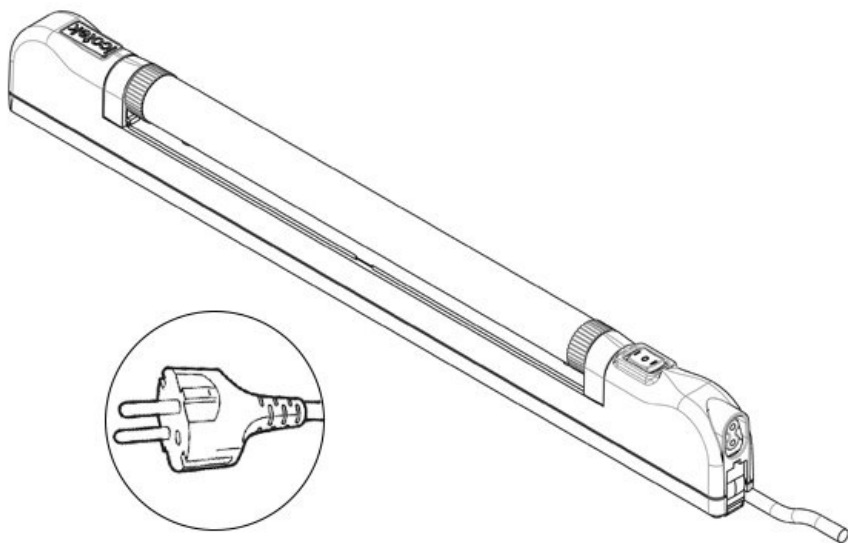


ArtNr.	81103	Connection possibilities	Door operated switch
EAN	4251269333040	Connector type	Plug CEE 7/17
Antal	1	Rated power	8 W
Längd	448 mm	Operating voltage	220 - 240 V AC, 50 - 60 Hz
Höjd	56,5 mm	Test standard	EN 60598, EN 55015, EN 61000, EN 62741
Bredd	26,2 mm	Protection class	II (Protective insulation)
Length connecting cable	1.500 mm	Guidelines	2014/35/EU, 2014/30/EU
		Service life	50.000 h
		Energy efficiency class	E
		Colour temperature	5.600 K
		Colour rendering index CRI	> 80
		Luminous flux	1.000 lm
		Färg	grå (liknande RAL 7035)

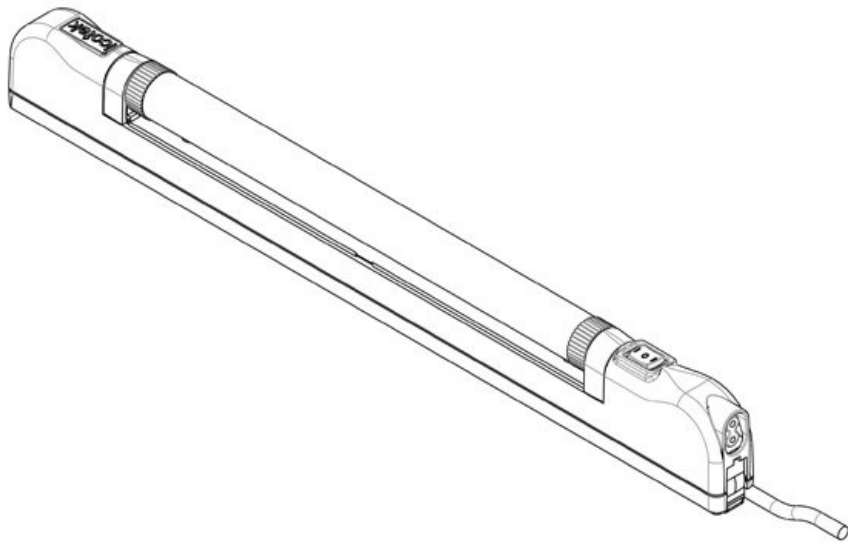


ArtNr.	81104	Connection possibilities	Door operated switch
EAN	4251269333057	Connector type	Ferrules
Antal	1	Rated power	8 W
Längd	448 mm	Operating voltage	100 - 240 V AC, 50 - 60 Hz
Höjd	56,5 mm	Test standard	EN 60598, EN 55015, EN 61000, EN 62741
Bredd	26,2 mm	Protection class	II (Protective insulation)
Length connecting cable	3.000 mm	Guidelines	2014/35/EU, 2014/30/EU
		Service life	50.000 h
		Energy efficiency class	E
		Colour temperature	5.600 K
		Colour rendering index CRI	> 80
		Luminous flux	1.000 lm
		Färg	grå (liknande RAL 7035)

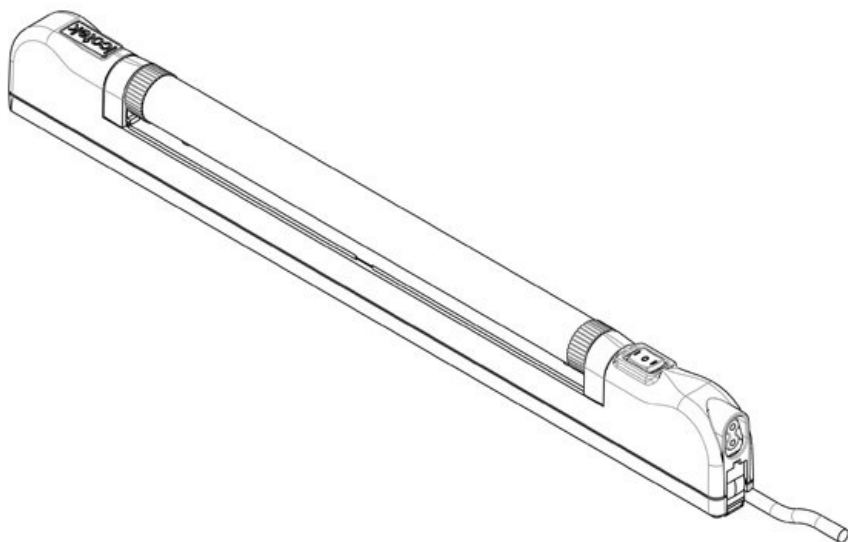

ArtNr.	81200	Length connecting cable	3.000 mm
EAN		Connection possibilities	Door operated switch
Antal	1	Connector type	Ferrules
UL-certifikat	cURus (in progress)	Rated power	8 W
Längd	448 mm	Operating voltage	100 - 240 V AC, 50 - 60 Hz
Höjd	56,5 mm	Test standard	EN 60598, EN 55015, EN 61000, EN 62741
Bredd	26,2 mm	Protection class	II (Protective insulation)
		Guidelines	2014/35/EU, 2014/30/EU
		Service life	50.000 h
		Energy efficiency class	E
		Colour temperature	5.600 K
		Colour rendering index CRI	> 80
		Luminous flux	1.000 lm
		Färg	grå (liknande RAL 7035)

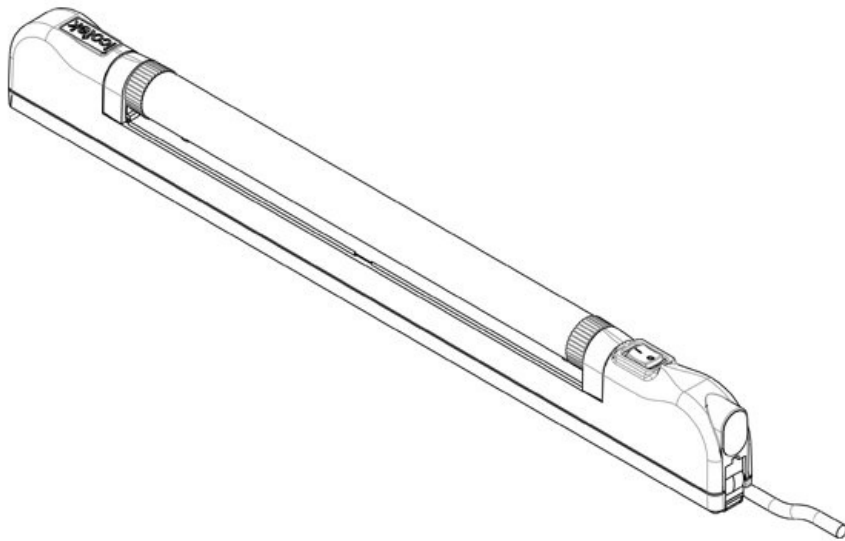

ArtNr.	81105	Version	PIR motion detector
EAN	4251269333064	Connector type	Ferrules
Antal	1	Rated power	8 W
Längd	448 mm	Operating voltage	100 - 240 V AC, 50 - 60 Hz
Höjd	56,5 mm	Test standard	EN 60598, EN 55015, EN 61000, EN 62741
Bredd	26,2 mm	Protection class	II (Protective insulation)
Length connecting cable	3.000 mm	Guidelines	2014/35/EU, 2014/30/EU
		Service life	50.000 h
		Energy efficiency class	E
		Colour temperature	5.600 K
		Colour rendering index CRI	> 80
		Luminous flux	1.000 lm
		Färg	grå (liknande RAL 7035)

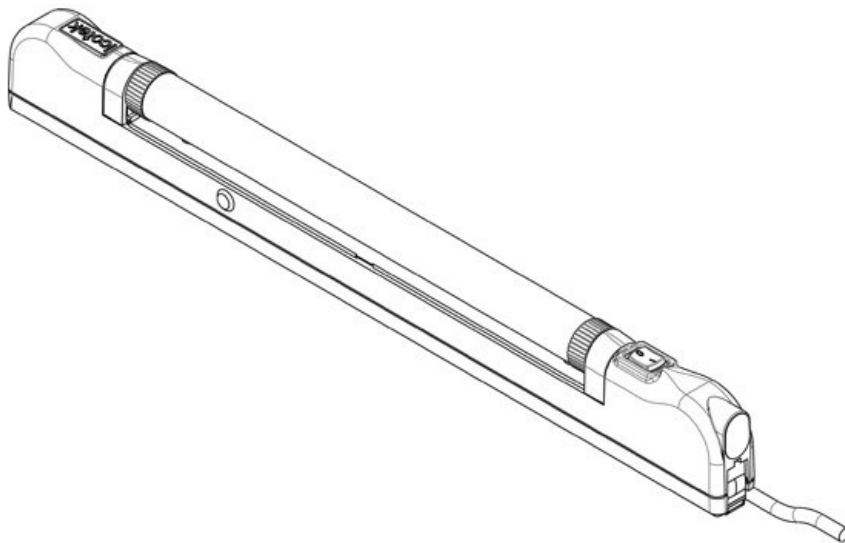

ArtNr.	81201	Length connecting cable	3.000 mm
EAN		Version	PIR motion detector
Antal	1	Connector type	Ferrules
UL-certifikat	cURus (in progress)	Rated power	8 W
Längd	448 mm	Operating voltage	100 - 240 V AC, 50 - 60 Hz
Höjd	56,5 mm	Test standard	EN 60598, EN 55015, EN 61000, EN 62741
Bredd	26,2 mm	Protection class	II (Protective insulation)
		Guidelines	2014/35/EU, 2014/30/EU
		Service life	50.000 h
		Energy efficiency class	E
		Colour temperature	5.600 K
		Colour rendering index CRI	> 80
		Luminous flux	1.000 lm
		Färg	grå (liknande RAL 7035)



ArtNr. **81135** Antal skruvhål **4**
EAN **4251269333** Skruvhålens **6,5 mm**
101 diameter
Antal **1**
Längd **484 mm**
Höjd **6 mm**
Bredd **44 mm**
Färg **svart**



ArtNr. **81134** Antal skruvhål **4**
EAN **4251269333** Skruvhålens **6,5 mm**
095 diameter
Antal **1**
Längd **484 mm**
Höjd **6 mm**
Bredd **44 mm**
Färg **grå**
(liknande RAL 7035)